


## ***Crossguide Directional Coupler***



Crossguide Directional Couplers covering a wide frequency range. Couplers are available in 3 or 4 port configuration. Standard coupling values are 20, 30, 40, 50 and 60 dB, with minimum Directivity of 18 dB. The compactness of crossguide coupler suits many applications where space is at a premium and directivity is not the prime consideration. Models are available with combinations of waveguide and coaxial ports. Special multi-port crossguide couplers can be manufactured to suit customer's special requirements.

### ➤ ***Style1 — 4 Waveguide Ports***

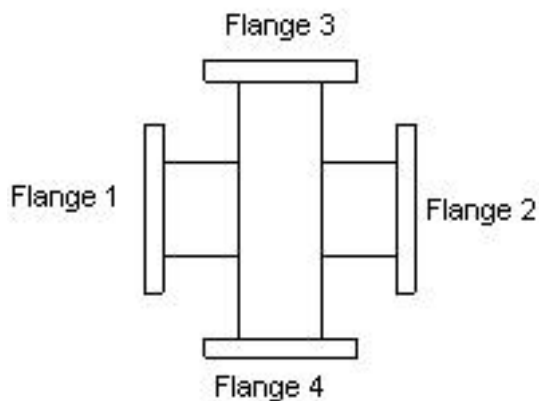

### ● ***Specifications***

Model No*	Freq Range (GHz)	Operating Bandwidth (%)**	VSWR (Max)		Coupling*** (dB)	Directivity (Min) (dB)	WG Type		Flange	Material
			Main Line	Secondary Line			IEC	EIA		
ID-22W+C...	1.72-2.61	10-20	1.10	1.15	18-60	18	R22	WR430	FDP/FDM	Al/Cu


ID-26W+C...	2.17-3.30	10-20	1.10	1.15	18-60	18	R26	WR340	FDP/FDM	Al/Cu
ID-32W+C...	2.60-3.95	10-20	1.10	1.15	18-60	18	R32	WR284	FDP/FDM	Al/Cu
ID-40W+C...	3.22-4.90	10-20	1.10	1.15	18-60	18	R40	WR229	FDP/FDM	Al/Cu
ID-48W+C...	3.94-5.99	10-20	1.10	1.15	18-60	18	R48	WR187	FDP/FDM	Al/Cu
ID-58W+C...	4.64-7.05	10-20	1.10	1.15	18-60	18	R58	WR159	FDP/FDM	Al/Cu
ID-70W+C...	5.38-8.17	10-20	1.10	1.15	18-60	18	R70	WR137	FDP/FDM	Al/Cu
ID-84W+C...	6.57-9.99	10-20	1.10	1.15	18-60	18	R84	WR112	FBP/FBM/FBE	Al/Cu
ID-100W+C...	8.20-12.40	10-20	1.10	1.15	18-60	18	R100	WR90	FBP/FBM/FBE	Al/Cu
ID-120W+C...	9.84-15.0	10-20	1.10	1.15	18-60	18	R120	WR75	FBP/FBM/FBE	Al/Cu
ID-140W+C...	11.9-18.0	10-20	1.10	1.15	18-60	18	R140	WR62	FBP/FBM/FBE	Al/Cu
ID-180W+C...	14.5-22.0	10-20	1.10	1.15	18-60	18	R180	WR51	FBP/FBM/FBE	Al/Cu
ID-220W+C...	17.6-26.7	10-20	1.10	1.15	18-60	18	R220	WR42	FBP/FBM/FBE	Al/Cu
ID-260W+C...	21.7-33.0	10-20	1.10	1.15	18-60	18	R260	WR34	FBP/FBM/FBE	Al/Cu
ID-320W+C...	26.3-40.0	10-20	1.15	1.15	18-60	18	R320	WR28	FBP/FBM/FBE	Al/Cu

\*Indicates Model Number. See Ordering Information for complete part number.

\*\*Typical operating bandwidth of the crossguide coupler is up to 20% of waveguide bandwidth.


\*\*\*Nominal Accuracy:  $\pm 0.7$ dB Frequency Sensitivity:  $\pm 1$ dB

### ● Ordering Information

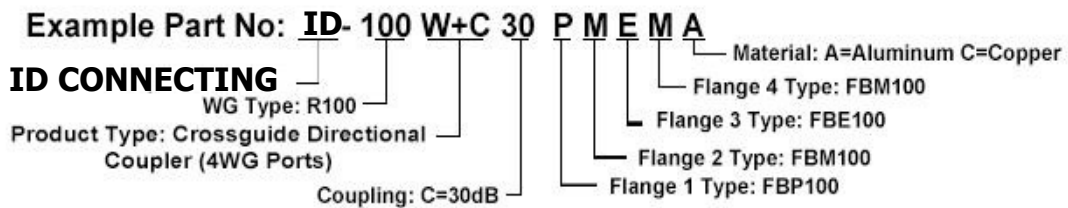

- Flange type: Multiple types available
- Finish: Corrosion protection plus black top coat.

### ➤ Style 2 — 3 Waveguide Ports

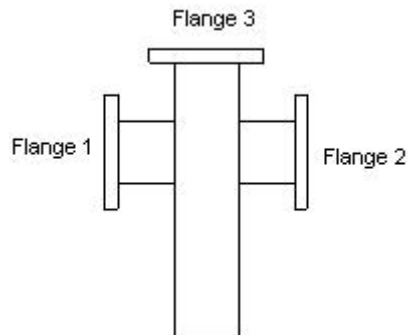

### ● Specifications

Model No*	Freq Range (GHz)	Operating Bandwidth	VSWR (Max)	Coupling* ** (dB)	Directivity (Min) (dB)	WG Type	Flange	Material
-----------	------------------	---------------------	------------	-------------------	------------------------	---------	--------	----------


			Main Line	Secondary Line			IEC	EIA		
ID22WL+C...	1.72-2.61	10-20	1.10	1.15	18-60	18	R22	WR43	FDP/FDM	Al/Cu
ID-26WL+C...	2.17-3.30	10-20	1.10	1.15	18-60	18	R26	WR34	FDP/FDM	Al/Cu
ID-32WL+C...	2.60-3.95	10-20	1.10	1.15	18-60	18	R32	WR28	FDP/FDM	Al/Cu
ID-40WL+C...	3.22-4.90	10-20	1.10	1.15	18-60	18	R40	WR22	FDP/FDM	Al/Cu
ID-48WL+C...	3.94-5.99	10-20	1.10	1.15	18-60	18	R48	WR187	FDP/FDM	Al/Cu
ID--58WL+C...	4.64-7.05	10-20	1.10	1.15	18-60	18	R58	WR159	FDP/FDM	Al/Cu
ID-70WL+C...	5.38-8.17	10-20	1.10	1.15	18-60	18	R70	WR137	FDP/FDM	Al/Cu
ID-84WL+C...	6.57-9.99	10-20	1.10	1.15	18-60	18	R84	WR112	FDP/FDM/	Al/Cu
ID-100WL+C	8.20-12.4	10-20	1.10	1.15	18-60	18	R100	WR90	FDP/FDM/	Al/Cu
ID-120WL+C	9.84-15.0	10-20	1.10	1.15	18-60	18	R120	WR75	FDP/FDM/	Al/Cu
ID-140WL+C	11.9-18.0	10-20	1.10	1.15	18-60	18	R140	WR62	FDP/FDM/	Al/Cu
ID-180WL+C	14.5-22.0	10-20	1.10	1.15	18-60	18	R180	WR51	FDP/FDM/	Al/Cu
ID-220WL+C	17.6-26.7	10-20	1.10	1.15	18-60	18	R220	WR42	FDP/FDM/	Al/Cu
ID-260WL+C	21.7-33.0	10-20	1.10	1.15	18-60	18	R260	WR34	FDP/FDM/	Al/Cu
ID-320WL+C	26.3-40.0	10-20	1.15	1.15	18-60	18	R320	WR28	FDP/FDM/	Al/Cu

\*Indicates Model Number. See Ordering Information for complete part number.

\*\*Typical operating bandwidth of the crossguide coupler is up to 20% of waveguide bandwidth.


\*\*\*Nominal Accuracy:  $\pm 0.7$ dB Frequency Sensitivity:  $\pm 1$ dB

### ● Ordering Information

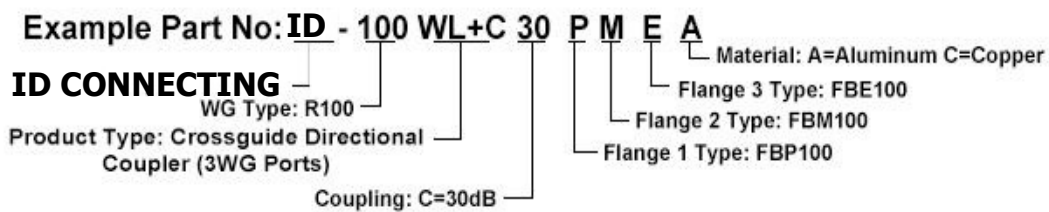

- Flange type: Multiple types available
- Finish: Corrosion protection plus black top coat

### ➤ Style 3 — 2 Waveguide Ports, 1 Coax Port

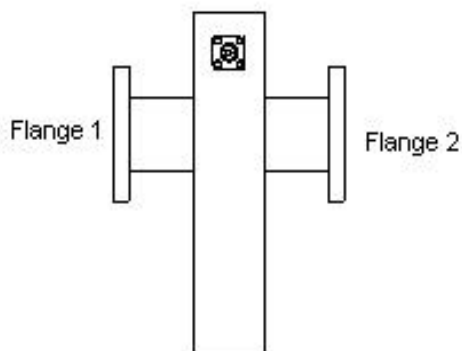

● **Specifications**

Model No*	Freq Range (GHz)	Operating Bandwidth (%)**	VSWR (Max)		Coupling*** (dB)	Directivity (Min) (dB)	WG Type		Flange	Coax Con	Material
			Main Line	Secondary Line			IEC	EIA			
ID-22WL+C...	1.72-2.	10-20	1.10	1.25	18-60	18	R22	WR43	FDP/FDM	N	Al/Cu
ID-26WL+C...	2.17-3.	10-20	1.10	1.25	18-60	18	R26	WR34	FDP/FDM	N	Al/Cu
ID-32WL+C...	2.60-3.	10-20	1.10	1.25	18-60	18	R32	WR28	FDP/FDM	N	Al/Cu
ID-40WL+C...	3.22-4.	10-20	1.10	1.25	18-60	18	R40	WR22	FDP/FDM	N	Al/Cu
ID-48WL+C...	3.94-5.	10-20	1.10	1.25	18-60	18	R48	WR18	FDP/FDM	N	Al/Cu
ID-58WL+C...	4.64-7.	10-20	1.10	1.25	18-60	18	R58	WR15	FDP/FDM	N	Al/Cu
ID-70WL+C...	5.38-8.	10-20	1.10	1.25	18-60	18	R70	WR13	FDP/FDM	N	Al/Cu
ID-84WL+C...	6.57-9.	10-20	1.10	1.25	18-60	18	R84	WR11	FBP/FBM/FB	N	Al/Cu
ID-100WL+C...	8.20-12	10-20	1.10	1.25	18-60	18	R10	WR90	FBP/FBM/FB	N	Al/Cu
ID-120WL+C...	9.84-15	10-20	1.10	1.25	18-60	18	R12	WR75	FBP/FBM/FB	SMA	Al/Cu
ID-140WL+C...	11.9-18	10-20	1.10	1.25	18-60	18	R14	WR62	FBP/FBM/FB	SMA	Al/Cu
ID-180WL+C...	14.5-22	10-20	1.10	1.30	18-60	18	R18	WR51	FBP/FBM/FB	SMA	Al/Cu
ID-220WL+C...	17.6-26	10-20	1.10	1.50	18-60	18	R22	WR42	FBP/FBM/FB	SMA	Al/Cu
ID-320WL+C...	26.3-40	10-20	1.15	1.50	18-60	18	R32	WR28	FBP/FBM/FB	SMA	Al/Cu

\*Indicates Model Number. See Ordering Information for complete part number.

\*\*Typical operating bandwidth of the crossguide coupler is up to 20% of waveguide bandwidth.

\*\*\*Nominal Accuracy:  $\pm 0.7$ dB Frequency Sensitivity:  $\pm 1$ dB

● **Ordering Information**

---

**Example Part No: ID - 100 WL+C 30 N K P M A**

**ID CONNECTING**

Material: A=Aluminum C=Copper

WG Type: R100

Flange 2 Type: FBM100

Flange 1 Type: FBP100

Product Type: Crossguide Directional Coupler (2WG Ports 1CoaxPort)

J=Male, K=Female

Coupling: C=30dB

Coax Connector Type: N=Type N, S=SMA, 2.92=K2.92mm, 2.4=2.4mm, TNC=TNC

- Flange type: Multiple types available
- Finish: Corrosion protection plus black top coat