


FEED, KU-BAND DUAL-PORT, MOTORIZED



Your Trusted Source for Satellite Equipment

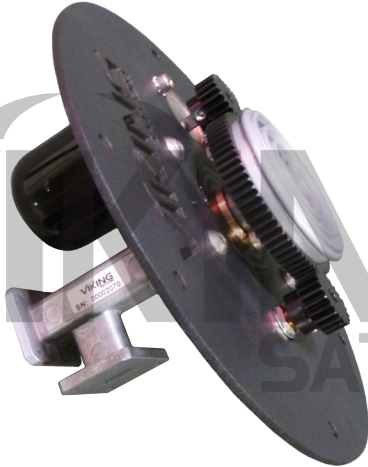

FEED-2KU-MOTO

- Motorized Receive-only 2-port KU-band Linear Prime Focus Feed
- 24 volt Motor and Potentiometer for Fine Polarization Adjustment
- For New Antennas or Upgrading Legacy Systems

FEATURES

- 100% Tested
- Full 280° of Travel
- Stainless Steel Hardware
- All Components Weather Resistant
- Field Replacement Components
- Hard Coat Anodized Aluminum Gears for wear protection
- Ideal for use with Research Concepts controllers
- Hi Torque 24VDC Motor / 5K 10 Turn Potentiometer
- Universal Mounting - Mounts to single pole, tripod and quadpod feed supports
- For use with new antennas or upgrading existing antennas in the field

SPECIFICATIONS

Polarity	Dual
Polarization	Linear
Frequency Range	10.7 - 12.75 GHz
f/D Range	.335 to .425
VSWR	1.5:1 Max
Polarization Isolation	35 dB (Typ.)
Rotation	280°
Temperature Range	-40° C to +60° C
Flanges	WR75 Cover
Weight	5.0 lbs

FEED-2KU-MOTO_REV003

sales@vikingsatcom.com • www.vikingsatcom.com

T: 517.629.3000 • F: 517.629.2379 • 704 North Clark Street • Albion, MI