

SATCOM COMPONENT

BPF

X-band BPF

BPF-7000, BPF-8000




TYPICAL SPECIFICATIONS

Center frequency	BPF-7500-500 : 7.50 GHz BPF-7650-500 : 7.65 GHz BPF-8250-500 : 8.25 GHz
Frequency range	BPF-7500-500 : 7.25 to 7.75 GHz BPF-7650-500 : 7.40 to 7.90GHz BPF-8250-500 : 8.00 to 8.50 GHz
Insertion loss in band	0.5dB max
Rejection	BPF-7500-500(from 7.90 to 8.40 GHz): 100 dB min. BPF-7650-500(from 8.05 to 8.60 GHz): 100 dB min. BPF-8250-500(from 8.65 to 9.20 GHz): 100 dB min.
Flanges	WR-112
Dimensions	375(L) x 64(W) x 48(H) mm

HOW TO ORDER X-BAND BPF

BPF-7500-500

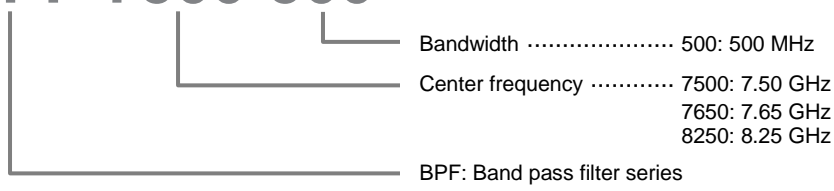

SATCOM COMPONENT

OUTLINE DRAWING

