




Cross Section

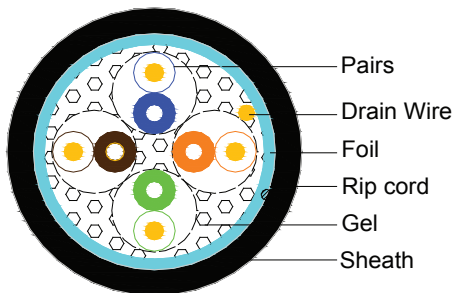

Electrical Characteristics(20°C)

Reference Standard: TIA/EIA-568-B.2 & IEC/ISO 11801

Test Item	Units	Spec
1. Conductor DC Resistance	Ω/100m	≤9.5
2. Unbalance or Pair DC Resistance	%	≤2.5
3. Dielectric Strength between Pairs	kV/min	≤1.0
4. Dielectric Strength Conductor to Screen	kV/min	≤2.5
5. Insulation Resistance	MΩ-km	≥5000
6. Capacitance	nF/100m	≤5.6
7. Unbalance of Capacitance	pF/100m	≤330
8. Characteristic Impedance (1 to 250MHz)	Ω	100±15
(250 to 350MHz)	Ω	100±25
(350 to 550MHz)	Ω	100±35

Cable Description

1)Conductor :	
Pairs	4
Total Conductor	8
AWG	24
Dia. of Conductor	Φ 0.51±0.02mm
Material	Solid Bare Copper
Elongation	≥15%
2)Insulation:	
Material	HDPE - Polyethylene
Nom. Thickness	0.24mm
Dia.	Φ 0.95±0.05mm
Elongation	≥300%
Color Cord	White/Blue & Blue
	White/Orange & Orange
	White/Green & Green
	White/Brown & Brown
3)Paired :	
Length of Lay	< 38 mm
4)Cabling :	
Order of the Pair	See the Cross Section
5)Shielding:	
Vertical wrap	A1-Mylar Tape
Coverage%	100%
AWG	24
Drain Wire	TC - Solid Tinned Copper
6)Outer Sheath :	
Filling	Gel Filled
Material	LDPE
Rip Cord	200Dx3
Nom. Thickness	0.72±0.05mm
O.D.	Φ 6.50±0.3mm
Color	Black
7)Packing :	
	1000Ft Reel-in-a-Box
	35Lbs

Frequency (MHz)	RL (dB)	SRL (dB)	ATTEN (dB/100m)	NEXT (dB/100m)
1	20.00	28.00	2.03	65.30
4	23.01	28.00	4.03	56.27
8	24.52	28.00	5.73	51.75
10	25.00	28.00	6.43	50.30
16	25.00	28.00	8.19	47.24
20	25.00	25.00	9.20	45.78
25	24.32	27.03	10.33	44.33
31.25	23.64	26.06	11.62	42.88
62.5	21.54	23.05	16.79	38.36
100	20.11	21.01	21.65	35.30
155	18.80	19.10	27.20	32.50
200	18.00	18.00	32.40	30.80
250	17.30	17.00	21.65	29.30
300	16.80	16.20	41.00	28.10
350	16.30	15.60	44.90	27.10

Frequency (MHz)	PSNEXT (dB/100m)	ELFEXT (dB/100m)	PSELFEXT (dB/100m)	Delay (ns/100m)
1	62.30	64.00	61.00	570
4	53.27	51.96	48.96	552
8	48.75	45.94	42.94	547
10	47.30	44.00	41.00	545
16	44.24	39.92	36.92	543
20	42.78	37.98	34.98	542
25	41.33	36.04	33.04	541
31.25	39.88	34.10	31.10	540
62.5	35.36	28.08	25.08	539
100	32.30	24.00	21.00	538
155	29.50	20.20	17.20	537
200	27.80	18.00	15.00	537
250	26.30	16.00	13.00	536
300	25.10	14.50	11.50	536
350	24.10	13.10	10.10	536