

25/50W Linear Ka-Band Antenna Mount High Power Amplifier



FEATURES

- Variable Gain Control
- Complete RS-232/422/485 Interface
- Ethernet Interface
- Lightweight Package

The **XTLIN-25/50Ka-2** High Power amplifiers are compact, fully integrated antenna mount units designed for low cost operation and longevity.

Intended for outdoor operation, these amplifiers increase the amount of RF power reaching the feed. The construction and light weight allows for direct mount to the antenna. This eliminates long waveguide runs and associated RF losses.


Forced air cooling is implemented in the package to allow reliable operation over extended temperature ranges. The monitor and control (M&C) interface provides a component system status.




PERFORMANCE SPECIFICATION

Parameters	XTLIN-25Ka-2	XTLIN-50Ka-2
FREQUENCY RANGE, extended frequency coverage available	30.0 to 31.0 GHz	
Reference Input Impedance	50 Ohms	
LINEAR OUTPUT POWER	25W	50W
GAIN		
Attenuator Range (continuous)	30 dB \pm 0.1 dB step size	
Maximum SSG Variation Over		
Any Narrow Band	0.80 dB maximum per 60 MHz	
Full Band	2.5 dB	
Slope (maximum)	\pm 0.04 dB/MHz	
Stability, 24 hr. (maximum)	\pm 0.25 dB	
Stability, Temperature (maximum)	\pm 1.0 dB over temperature range at any frequency	
INTERMODULATION with two equal carriers @ linear power	-25 dBc relative to the sum of all carriers	
SPECTRAL REGROWTH, 1 SR offset @ linear power (maximum) (QPSK)	-30dBc	
HARMONIC OUTPUT (maximum)	-60 dBc	
AM/PM CONVERSION (maximum)	2.0 deg/dB at or below linear power	
NOISE POWER (maximum)		
Transmit Band	-70 dBW/4 kHz	
Receive Band	-150 dBW/4 kHz	
GROUP DELAY (maximum)		
Bandwidth	Any 60 MHz	
Linear	\pm 0.01 nS/MHz	
Parabolic	\pm 0.005 nS/MHz ²	
Ripple	0.5 nS/Pk-Pk	
RESIDUAL AM NOISE (maximum)	-50 dBc to 10 kHz -20 (1.5 + logf) dBc 10 to 500 kHz -85 dBc above 500 kHz	
PHASE NOISE (maximum)	10 Hz	-40 dBc/Hz
	100 Hz	-70 dBc/Hz
	1 kHz	-80 dBc/Hz
	10 kHz	-90 dBc/Hz
	100 kHz	-100 dBc/Hz
	1 MHz	-100 dBc/Hz
	10 MHz	-100 dBc/Hz
VSWR		
Input (maximum)	1.3:1	
Output (maximum)	1.3:1	

BLOCK DIAGRAM

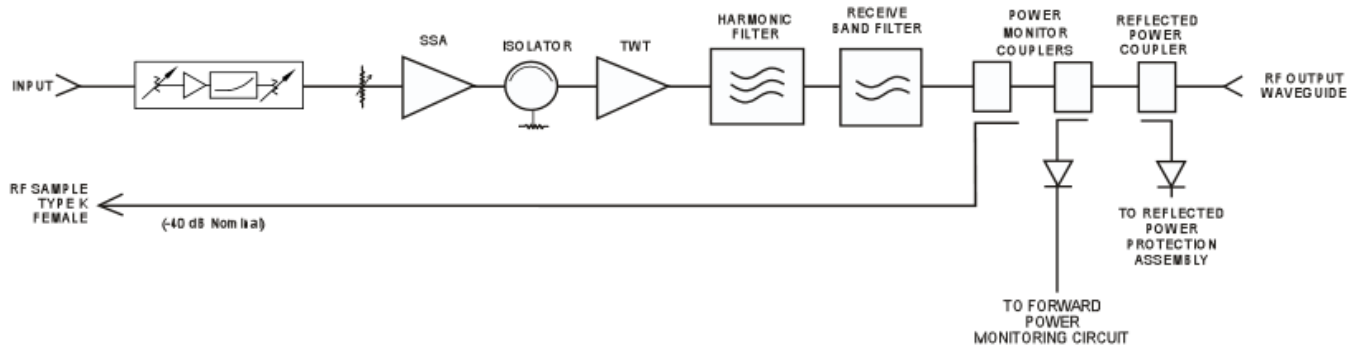

OUTLINE DRAWING

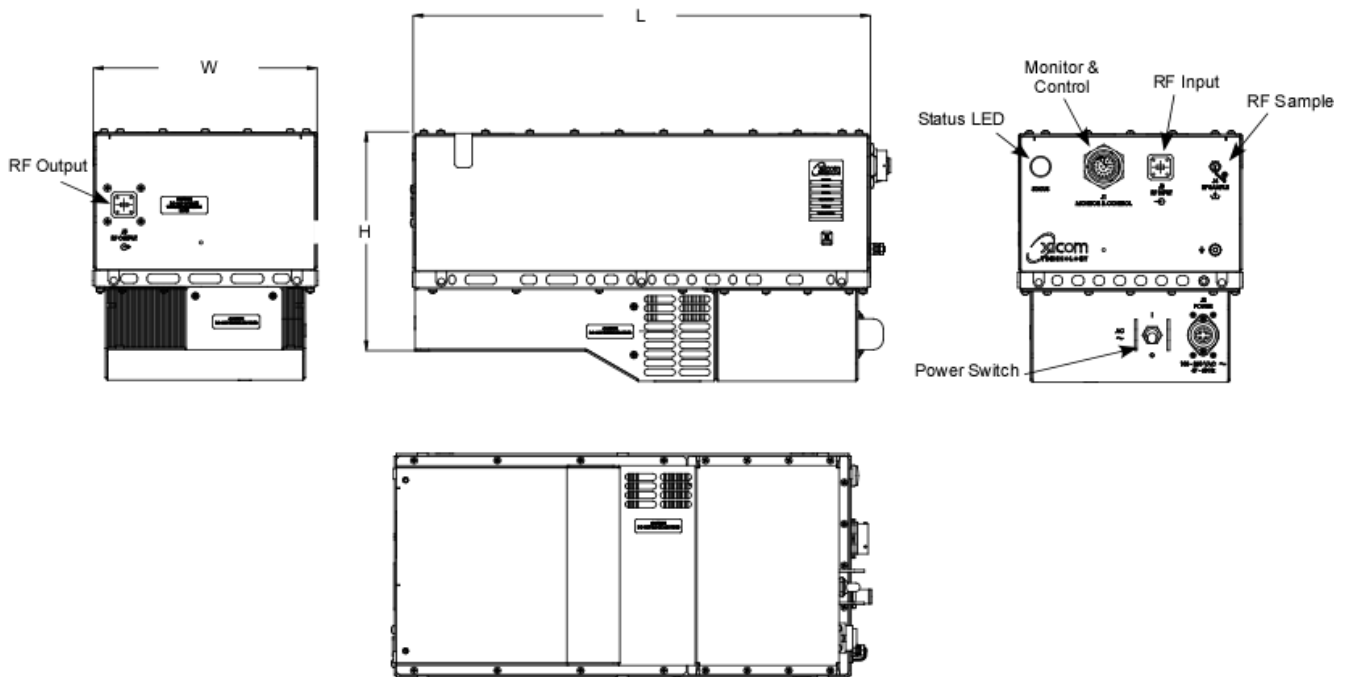

DIMENSIONS		
	Inches	Centimeters
W	8.38	21.29
L	17.06	43.33
H	9.22	23.42
Weight = 30 lbs. typical (13.6 kg)		
RF Output: WR-28		

PRIME POWER

90 to 264 VAC
 47 to 63 Hz, Single Phase
 400 VA Typical @ 90 VAC
 0.95 Minimum Prime Power Factor
 0.98 Prime Power Factor Typical



ENVIRONMENT

NONOPERATING TEMPERATURE RANGE	-50°C to +70°C
OPERATING TEMPERATURE RANGE	-40°C to +60°C
HUMIDITY	Up to 100% Condensing
ALTITUDE	10,000 feet MSL maximum
SHOCK AND VIBRATION	Normal Transportation
COOLING	Forced Air

INTERFACE

Type	Function	
LOCAL CONTROL	Prime Power ON/OFF HV ON/OFF	Local/Remote
LOCAL STATUS	Tri-Color LED: Fault Red HV ON: Green	Standby: Continuous Amber FTD: Flashing Amber
REMOTE CONTROL	High Voltage ON/OFF Min/Max Power Alarm/Fault Reflected Power Alarm/Fault Heater Standby ON/OFF	Constant Power Gain Fault Reset Units (Watts, dBm, dBW)
REMOTE STATUS	HV ON RF Output Power Reflected Power Upconverter Fault Filament Time Delay	Heater/Beam Hours Fault Identification TWT Temperature Helix Current Helix Voltage
FORM C DRY CONTACT CLOSURE	Summary Fault (2X Form C Dry Contact Closure)	
COMPUTER SERIAL PORT	Hardware Interface - 2 Ports: RS-232 & RS-422/485	Xicom Command Set: ASCII Commands
RF SAMPLE PORT COUPLING	-40 dB Coupling Value (approx.)	

OPTIONS

- Alternate Frequency Coverage
- Remote External Controller
- 1:1, 1:2, 1:N Redundancy
- Phase Combined
- HPA Only

Headquarters

Comtech Xicom Technology, Inc.
 3550 Bassett Street
 Santa Clara, CA 95054
 USA

Phone: +1-408-213-3000

Fax: +1-408-213-3001

email: sales@xicomtech.com

Web: www.xicomtech.com

European Sales Office

Comtech Xicom Technology Europe, LTD
 4 Portland Business Center
 Manor House Lane
 Datchet
 Berkshire SL3 9EG
 United Kingdom

Phone: +011 44 (0) 1753 549 999

Fax: +011 44 (0) 1753 549 997

email: sales@xicomeurope.com

Web: www.xicomtech.com

Singapore Sales Office

Comtech Xicom Technology
 150 Cecil Street
 #08-02
 Singapore 069543

Phone: +011 65 6325 1953

Fax: +011 65 6325 1950

email: asiasales@xicomtech.com

Web: www.xicomtech.com