

LMR[®]-600-UF UltraFlex Communications Coax

Ideal for...

- Jumper Assemblies in Wireless Communications Systems
- Short Antenna Feeder runs
- Any application that requires periodic/repeated flexing



| Part Description | | | | |
|------------------|----------------|--------|-------|------------|
| Part Number | Application | Jacket | Color | Stock Code |
| LMR-600-UF | Indoor/Outdoor | TPE | Black | 54044 |


| Environmental Specifications | | | |
|--------------------------------|----------|---------|--|
| Performance Property | 'F | °C | |
| Installation Temperature Range | -40/+185 | -40/+85 | |
| Storage Temperature Range | -94/+185 | -70/+85 | |
| Operating Temperature Range | -40/+185 | -40/+85 | |

| Construction Specifications | | | |
|-----------------------------|-------------------------------|-------|---------|
| Description | Material | In. | (mm) |
| Inner Conductor | Stranded BC | 0.176 | (4.47) |
| Dielectric | Foam Polyethylene | 0.455 | (11.56) |
| Outer Conductor | Aluminum Tape | 0.461 | (11.71) |
| Overall Braid | Tinned Copper | 0.490 | (12.45) |
| Jacket | Black Thermoplastic Elastomer | 0.590 | (14.99) |

| Mechanical Specifications | | | |
|---------------------------|----------------|-------|----------|
| Performance Property | Units | US | (metric) |
| Bend Radius: installation | in. (mm) | 1.5 | (38.1) |
| Bend Radius: repeated | in. (mm) | 6.0 | (152.4) |
| Bending Moment | ft-lb (N-m) | 1.75 | (2.37) |
| Weight | lb/ft (kg/m) | 0.165 | (0.25) |
| Tensile Strength | lb (kg) | 350 | (158.9) |
| Flat Plate Crush | lb/in. (kg/mm) | 40 | (0.71) |

| Electrical Specifications | | | |
|---------------------------|-------------------|-------|----------|
| Performance Property | Units | US | (metric) |
| Velocity of Propagation | % | 87 | |
| Dielectric Constant | NA | 1.32 | |
| Time Delay | nS/ft (nS/m) | 1.17 | (3.83) |
| Impedance | ohms | 50 | |
| Capacitance | pF/ft (pF/m) | 23.4 | (76.6) |
| Inductance | uH/ft (uH/m) | 0.058 | (0.19) |
| Shielding Effectiveness | dB | >90 | |
| DC Resistance | | | |
| Inner Conductor | ohms/1000ft (/km) | 0.43 | (1.42) |
| Outer Conductor | ohms/1000ft (/km) | 1.2 | (3.9) |
| Voltage Withstand | Volts DC | 4000 | |
| Jacket Spark | Volts RMS | 8000 | |
| Peak Power | kW | 40 | |

Attenuation vs. Frequency (typical)

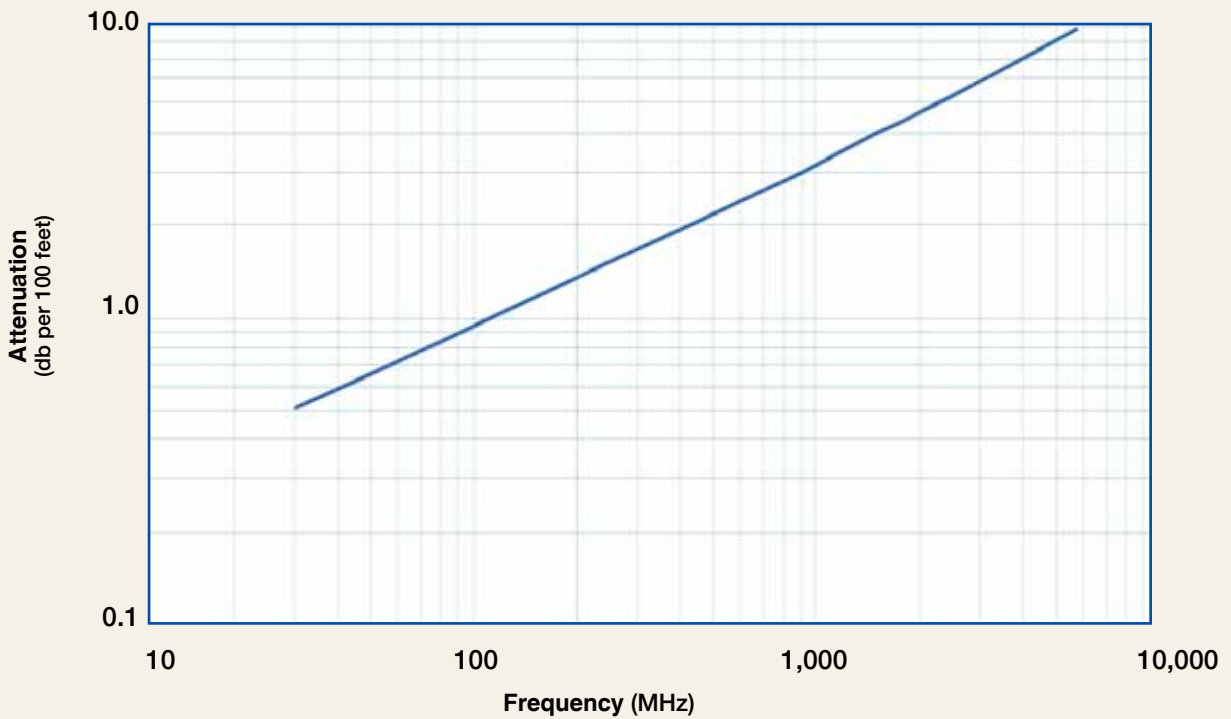

| Frequency (MHz) | 30 | 50 | 150 | 220 | 450 | 900 | 1500 | 1800 | 2000 | 2500 | 5800 |
|-----------------------|------|------|------|------|------|------|------|------|------|------|------|
| Attenuation dB/100 ft | 0.5 | 0.7 | 1.2 | 1.4 | 2.1 | 3.0 | 4.0 | 4.4 | 4.7 | 5.3 | 8.7 |
| Attenuation dB/100 m | 1.7 | 2.2 | 3.8 | 4.6 | 6.8 | 9.8 | 13.1 | 14.5 | 15.3 | 17.4 | 28.6 |
| Avg. Power kW | 4.59 | 3.53 | 2.00 | 1.64 | 1.12 | 0.77 | 0.58 | 0.52 | 0.49 | 0.43 | 0.26 |

Calculate Attenuation =

$(0.090660) \cdot \sqrt{\text{FMHz}} + (0.000312) \cdot \text{FMHz}$ (interactive calculator available at http://www.timesmicrowave.com/cable_calculators)

Attenuation:

VSWR=1.0; Ambient = +25°C (77°F)

Power:


VSWR=1.0; Ambient = +40°C; Inner Conductor = 100°C (212°F); Sea Level; dry air; atmospheric pressure; no solar loading

LMR[®]-600-UF UltraFlex Communications Coax



| Connectors | | | | | | | | | | | | | | |
|--------------------|---------------|------------------|------------|-----------------------|--------------|----------------------|----------------------|----------------------|-------------------|------------------|------------------|--|--|--|
| Interface | Description | Part Number | Stock Code | VSWR** Freq. (GHz) | Coupling Nut | Inner Contact Attach | Outer Contact Attach | Finish* Body /Pin | Length in (mm) | Width in (mm) | Weight lb (g) | | | |
| 1. 7-16 DIN Female | Straight Jack | TC-600-716-FC | 3190-375 | <1.25:1 (2.5) | NA | Solder | Clamp | S/S | 1.1 (28) | 1.00 (25.4) | 0.249 (112.9) | | | |
| 2. 7-16 DIN Male | Straight Plug | TC-600-716-MC | 3190-502 | <1.25:1 (2.5) | Hex | Solder | Clamp | S/S | 2.0 (51) | 1.30 (33.0) | 0.347 (157.4) | | | |
| 3. 7-16 DIN Male | Right Angle | TC-600-716M-RA | 3190-395 | <1.35:1 (2.5) | Hex | Solder | Crimp | S/S | 1.4 (36) | 1.40 (35.6) | 0.354 (160.8) | | | |
| 4. N Male | Straight Plug | TC-600-NMC | 3190-357* | <1.25:1 (2.5) | Hex | Solder | Clamp | S/G | 2.1 (53) | 0.92 (23.4) | 0.208 (93.4) | | | |
| 5. N Male | Right Angle | TC-600-NMC-RA | 3190-233 | <1.35:1 (2.5) | Hex | Solder | Clamp | S/G | 2.1 (53) | 0.92 (23.4) | 0.280 (117.9) | | | |
| 6. N Male | Right Angle | TC-600-NMH-RA-D | 3190-2427 | <1.35:1(6) | Hex | Solder | Crimp | A/G | 1.8 (46.5) | 1.62 (41.2) | 0.185 (84.3) | | | |
| 7. N Male | Straight Plug | TC-600-NMH-75/50 | 3190-1610 | <1.35:1 (6) | Hex | Solder | Crimp | N/G | 2.1 (52.8) | 0.91 (23.1) | 0.130 (59.0) | | | |
| 8. TNC | Straight Plug | TC-600-TM-RP | 3190-1064 | <<1.35:1 (6) | Knurl | Solder | Crimp | N/G | 1.6 (40.2) | 0.68 (17.0) | 0.090 (40.8) | | | |
| 9. TNC | Straight Plug | TC-600-TM-X | 3190-2530 | <1.25:1 (6) | Hex/Knurl | Solder | Crimp | A/G | 2.3 (57.6) | 0.75 (19.0) | 0.100 (45.6) | | | |
| 10. BNC Male | Right Angle | TC-600-BM-RA | 3190-2734 | <1.30:1 (4) | Knurl | Solder | Crimp | A/G | 1.8 (45.5) | 1.54 (39.0) | 0.164 (74.3) | | | |
| 11. N Female | Bulkhead Jack | TC-600-NF-BH | 3190-589* | <1.25:1 (2.5) | NA | Solder | Crimp | S/G | 2.4 (61) | 0.88 (22.4) | 0.195 (88.5) | | | |
| 12. N Female | Bulkhead Jack | TC-600-NFC-BH | 3190-466 | <1.25:1 (2.5) | NA | Solder | Clamp | S/G | 2.2 (56) | 0.94 (23.9) | 0.214 (97.1) | | | |
| 13. UHF Male | Straight Plug | TC-600-UMC | 3190-213 | <1.25:1 (2.5) | Knurl | Solder | Clamp | S/G | 1.7 (43) | 0.88 (22.4) | 0.198 (89.8) | | | |
| 14. N Male | Straight Plug | TC-600-NMH-X | 3190-2628 | <1.25:1 (8) | Hex/Knurl | Solder | Crimp | A/G | 2.1 (53) | 0.92 (23.4) | 0.166 (75.3) | | | |
| 15. BNC Male | Right Angle | TC-600-BM-RA | 3190-2734 | <1.30:1 (4) | Knurl | Solder | Crimp | A/G | 1.8 (45.5) | 1.54 (39.0) | 0.164 (74.3) | | | |

* Finish metals: N=Nickel, S=Silver, G=Gold, SS=Stainless Steel, A=Alballoy **VSWR spec based on 3 foot cable with a connector pair

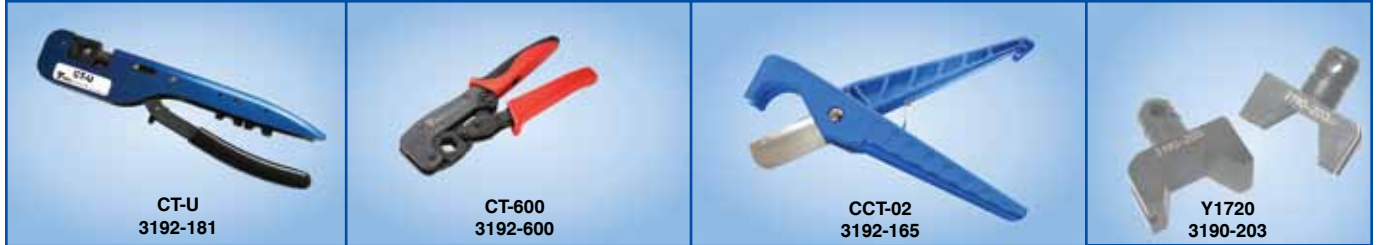

Install Tools

| Type | Part Number | Stock Code | Description |
|-------------------|-------------|------------|------------------------------------|
| Crimp Tool | CT-U | 3192-181 | Crimp Handle (Dies Required) |
| Crimp Dies | Y1720 | 3190-203 | .610" Hex Dies |
| Crimp Tool | CT-600 | 3192-170 | Crimp tool for LMR-600 connectors |
| Cutting Tool | CCT-02 | 3192-165 | Cable end flush cut tool |
| Replacement Blade | RB-01 | 3190-1609 | Replacement blade for cutting tool |



Accessories

| Type | Part Number | Stock Code | Description |
|----------------------------------|--|------------|--------------------------------------|
| Ground Kit | GK-S600TT | GK-S600TT | Standard Grounding Kit (each) |
| Hoisting Grip | HG-600T | HG-600T | Split/Laced Type (each) |
| Cold Shrink | CS-A600T | CS-A600T | Cable to Antenna Junction (each) |
| Cold Shrink | CS-60120T | CS-60120T | LMR-600 to -1200 Junction (each) |
| Cold Shrink | CS-60170T | CS-60170T | LMR-600 to -1700 Junction (each) |
| Standard Entry Port Cushion | SC-600T-3 | SC-600T-3 | Three Cables (each) |
| Standard Entry Panels | Full Range of Port Styles/Combinations Available | | |
| Hanger Blocks | CB-600T | CB-600T | Dual Cable Support Block (kit of 10) |
| Hanger Block Supporting Hardware | Complete Range of Supporting Hardware & Adapters Available | | |