



*1:1 Redundant in 1RU  
FCB200R*



## Features

- Two hot swappable converters in 1RU
- Cost effective solution
- Full range of block and agile converters
- Exceeds IESS 308/309 requirements by 5 dB
- High linearity
- Low group delay
- Front panel control (local)
- Full remote control (remote)

## Overview

The Advantech Wireless Dual - HP range of converters uses the latest technology in conversion, giving two independent conversion chains in 1 RU package, local and remote control thus providing the ultimate in performance and user friendly operation at a very competitive price.

The spectral purity, low phase noise and stability exceed the requirements of all major international satellite network operators.

The flexible and comprehensive monitor and control features on the HP converter ensure that it will fit into any network management system architecture. The user-friendly front panel or the RS485 remote interface will provide full set-up and fault monitoring facilities. The RS232 will provide the Monitor and Control functions via a PC and will also allow for software downloading.

The converter uses a PLL oscillator either locked to a highly stable internal 10 MHz reference or if the external reference option is fitted and the proper level of signal is present, the PLL oscillator will automatically lock to the external reference.

## Application

The HP range of converters is particularly suited for use in VSAT, SCPC Networks, SNG, DVB-RCS and Hub systems where compact redundancy is required. This makes them an ideal choice for large earth stations requiring cost effective solutions for frequency conversion. The lightweight, rugged and compact design also ensures that the HP converter provides the ideal solution for mobile truck or flyaway DSNG systems. With fully welded aluminum chassis and robust modular internal construction the converter can even meet the demands of military installations. The HP range of converters provides an industry leading MTBF of over 120,000 hours.


## Operating Bands

### Up-Converters

Model Number	Input Frequency	Output Frequency
ARUD-LSR	950-1350 MHz	2.0 – 2.4 GHz Non-inverted

### Down-Converters

Model Number	Input Frequency	Output Frequency
ARDD-SLR	2.0 – 2.4 GHz	950 – 1350 MHz Non-inverted

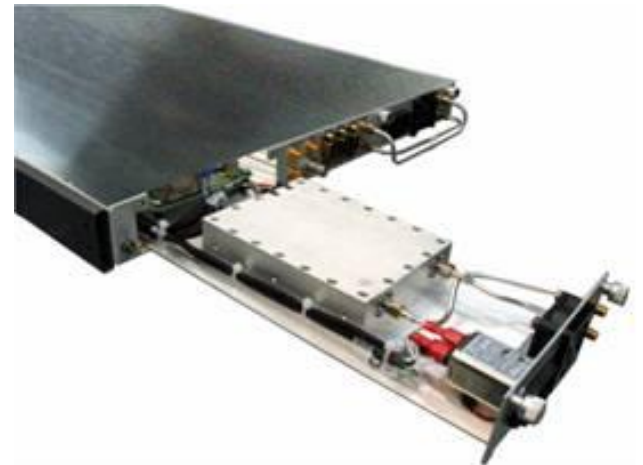

# S-Band Block Redundant Frequency Converters

## Technical Specifications

Up-Converter		Down-Converter	
<b>IF Input</b>		<b>RF Input</b>	
Frequency range	(See table on front page)	Frequency range	(See table on front page)
Impedance	50 Ω	Impedance	50 Ω
Input Connector	BNC (female)	Input Connector	Type N (female)
Return loss	16 dB	Return loss	16 dB
<b>RF Output</b>		<b>IF Output</b>	
Output power (P1dB)	+5 dBm at P1dB	Output power (P1dB)	+5 dBm at P1dB
Frequency range	(See table on front page)	Frequency range	(See table on front page)
IMD3 (two tone)	-45 dBc max @ -5 dBm output	IMD3 (two tone)	-45 dBc max @ -5 dBm output
Output connector	Type N (female)	Output connector	BNC (female)
Connector Impedance	50 Ω	Connector Impedance	50 Ω
Return loss	16 dB	Return loss	16 dB
<b>Transfer Characteristics</b>		<b>Transfer Characteristics</b>	
Conversion Gain	20 dB @ max gain setting	Conversion Gain	30 dB @ max gain setting (20dB option)
Gain adjustment	20 dB	Gain adjustment	20 dB
Attenuator step size	0.1 dB	Attenuator step size	0.1 dB
Gain flatness	±1.0 dB p-p over 400 MHz 0.6 dB p-p over 40 MHz	Gain flatness	±1.0 dB p-p over 400 MHz 0.6 dB p-p over 40 MHz
Gain stability	±0.25 dB max. /24 hours ±1.0 dB over temp. range	Gain stability	±0.25 dB max. / 24 hours ±1 dB over temp. range
Spurious	<-60 dBc signal related @ -5 dBm <-70 dBm signal independent	Spurious	-60 dBc @ Pout = -5 dBm
		Image rejection	60 dB
		Noise Figure	15 dB
Phase noise	-65 dBc/Hz @ 100Hz -75 dBc/Hz @ 1kHz -85 dBc/Hz @ 10kHz -105 dBc/Hz @ 100KHz	Phase noise	-65 dBc/Hz @ 100Hz -75 dBc/Hz @ 1kHz -85 dBc/Hz @ 10kHz -105 dBc/Hz @ 100KHz
<b>Reference</b>		<b>Mechanical</b>	
External Reference	10 MHz, +/- 5 dBm input level	Dimensions	Width 19" (482.6 mm)
Internal reference stability	± 2 x 10 <sup>-8</sup> over 0°C to +50°C		Height 1U 1.75" (44.5 mm)
Aging	± 2 x 10 <sup>-10</sup> / day ± 5 x 10 <sup>-8</sup> / year		Depth 22" (558.8 mm)
<b>Environmental</b>		<b>Power Supply</b>	
Operational	0°C to +50°C standard	Voltage	90 – 265 VAC (47 – 63 Hz)
Storage	-55°C to +85°C	Power	40W (typical)
Humidity	Non-condensing	Connector	IEC 603320 10A
Altitude	3,000m AMSL		
		<b>Monitor and Control</b>	
		RS 485	DB9
		RS 232	DB9
		Discrete	DB9
		Ethernet (optional)	RJ45 F

**NORTH AMERICA  
USA**  
Tel: +1 770 456 5601  
Fax: +1 770 456 5698  
info.usa@advantechwireless.com

**CANADA**  
Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.canada@advantechwireless.com

**SOUTH AMERICA**  
Tel: +1 514 420 0045  
Fax: +1 514 420 0073  
info.latam@advantechwireless.com

**BRAZIL**  
Tel: +55 11 4810 8890  
info.brazil@advantechwireless.com

**EUROPE  
UNITED KINGDOM**  
Tel: +44 1480 357 600  
Fax: +44 1480 357 601  
info.uk@advantechwireless.com

**RUSSIA & CIS**  
Tel: +7 495 971 59 18  
info.russia@advantechwireless.com

**ASIA**  
Tel: +1 514 420 0045 ext. 3116  
Fax: +1 514 420 0073  
info.asia@advantechwireless.com

**INDIA**  
Tel: +1 770 400 9544  
info.india@advantechwireless.com

**INDONESIA**  
Tel: +1 514 420 0045  
Info.indonesia@advantechwireless.com

An ISO 9001 : 2008 Company



Ref.: PB-FCB-SL200R-17219